

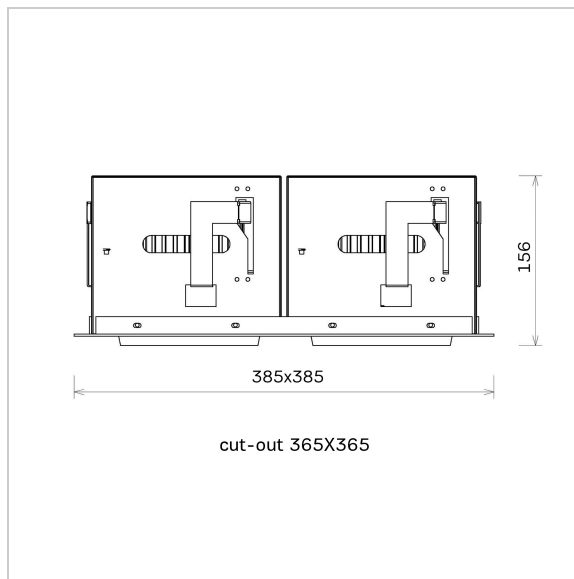


# CARDAN LARGE FOUR



Recessed cardanic LED downlight supplied in white, grey and black. Available in CCT from 2700K till 5700K in CRI80 or CRI90 and also in special colors for retail use. Reflectors with 15°, 30°, 45° or 60° and various accessories allow installations in a large range of applications.

<b>PREMIUM WHITE</b>	<b>CRISP WHITE</b>					



<b>Sku</b>	<b>Luminous Flux</b>	<b>Connected Load</b>	<b>CCT</b>	<b>CRI</b>	<b>Color housing</b>	<b>Beam angle</b>
<u>1.027A0A830003000000</u>	4x1250Lm	4x9.5W	3000K	(RA) >80	White (RAL 9003)	15°/30°/45°/60°
<u>1.027A0A930003000000</u>	4x1050Lm	4x9.5W	3000K	(RA) >90	White (RAL 9003)	15°/30°/45°/60°
<u>1.027A0A940PW3000000</u>	4x1100Lm	4x9.5W	4000K	(RA) >90	White (RAL 9003)	15°/30°/45°/60°
<u>1.027B0A840003000000</u>	4x1300Lm	4x9.5W	4000K	(RA) >80	White (RAL 9003)	15°/30°/45°/60°
<u>1.027C0A930003000000</u>	4x2000Lm	4x18.5W	3000K	(RA) >90	White (RAL 9003)	15°/30°/45°/60°
<u>1.027C0A940PW3000000</u>	4x2150Lm	4x18.5W	4000K	(RA) >90	White (RAL 9003)	15°/30°/45°/60°
<u>1.027D0A830003000000</u>	4x2400Lm	4x18.5W	3000K	(RA) >80	White (RAL 9003)	15°/30°/45°/60°
<u>1.027D0A840003000000</u>	4x2500Lm	4x18.5W	4000K	(RA) >80	White (RAL 9003)	15°/30°/45°/60°
<u>1.027E0A830003000000</u>	4x3250Lm	4x26W	3000K	(RA) >80	White (RAL 9003)	15°/30°/45°/60°
<u>1.027E0A930003000000</u>	4x3000Lm	4x30W	3000K	(RA) >90	White (RAL 9003)	15°/30°/45°/60°
<u>1.027E0A940PW3000000</u>	4x3250Lm	4x30W	4000K	(RA) >90	White (RAL 9003)	15°/30°/45°/60°
<u>1.027F0A840003000000</u>	4x3370Lm	4x26W	4000K	(RA) >80	White (RAL 9003)	15°/30°/45°/60°
<u>1.027G0A830003000000</u>	4x4250Lm	4x33W	3000K	(RA) >80	White (RAL 9003)	15°/30°/45°/60°

Sku	Luminous Flux	Connected Load	CCT	CRI	Color housing	Beam angle
<u>1.027G0A930003000000</u>	4x4100Lm	4x38.5W	3000K	(RA) >90	White (RAL 9003)	15°/30°/45°/60°
<u>1.027H0A840003000000</u>	4x4450Lm	4x33W	4000K	(RA) >80	White (RAL 9003)	15°/30°/45°/60°
<u>1.027H0A940PW3000000</u>	4x4400Lm	4x38.5W	4000K	(RA) >90	White (RAL 9003)	15°/30°/45°/60°
<u>1.027A0C830003000000</u>	4x1250Lm	4x9.5W	3000K	(RA) >80	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027A0C930003000000</u>	4x1050Lm	4x9.5W	3000K	(RA) >90	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027A0C940PW3000000</u>	4x1100Lm	4x9.5W	4000K	(RA) >90	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027B0C840003000000</u>	4x1300Lm	4x9.5W	4000K	(RA) >80	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027C0C930003000000</u>	4x2000Lm	4x18.5W	3000K	(RA) >90	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027C0C940PW3000000</u>	4x2150Lm	4x18.5W	4000K	(RA) >90	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027D0C830003000000</u>	4x2400Lm	4x18.5W	3000K	(RA) >80	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027D0C840003000000</u>	4x2500Lm	4x18.5W	4000K	(RA) >80	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027E0C830003000000</u>	4x3250Lm	4x26W	3000K	(RA) >80	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027E0C930003000000</u>	4x3000Lm	4x30W	3000K	(RA) >90	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027E0C940PW3000000</u>	4x3250Lm	4x30W	4000K	(RA) >90	Grey (RAL 9006)	15°/30°/45°/60°

Sku	Luminous Flux	Connected Load	CCT	CRI	Color housing	Beam angle
<u>1.027F0C840003000000</u>	4x3370Lm	4x26W	4000K	(RA) >80	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027G0C830003000000</u>	4x4250Lm	4x33W	3000K	(RA) >80	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027G0C930003000000</u>	4x4100Lm	4x38.5W	3000K	(RA) >90	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027H0C840003000000</u>	4x4450Lm	4x33W	4000K	(RA) >80	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027H0C940PW3000000</u>	4x4400Lm	4x38.5W	4000K	(RA) >90	Grey (RAL 9006)	15°/30°/45°/60°
<u>1.027A0B830003000000</u>	4x1250Lm	4x9.5W	3000K	(RA) >80	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027A0B930003000000</u>	4x1050Lm	4x9.5W	3000K	(RA) >90	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027A0B940PW3000000</u>	4x1100Lm	4x9.5W	4000K	(RA) >90	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027B0B840003000000</u>	4x1300Lm	4x9.5W	4000K	(RA) >80	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027C0B930003000000</u>	4x2000Lm	4x18.5W	3000K	(RA) >90	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027C0B940PW3000000</u>	4x2150Lm	4x18.5W	4000K	(RA) >90	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027D0B830003000000</u>	4x2400Lm	4x18.5W	3000K	(RA) >80	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027D0B840003000000</u>	4x2500Lm	4x18.5W	4000K	(RA) >80	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027E0B830003000000</u>	4x3250Lm	4x26W	3000K	(RA) >80	Black (RAL 9005)	15°/30°/45°/60°

SKU	Luminous Flux	Connected Load	CCT	CRI	Color housing	Beam angle
<u>1.027E0B930003000000</u>	4x3000Lm	4x30W	3000K	(RA) >90	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027E0B940PW3000000</u>	4x3250Lm	4x30W	4000K	(RA) >90	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027F0B840003000000</u>	4x3370Lm	4x26W	4000K	(RA) >80	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027G0B830003000000</u>	4x4250Lm	4x33W	3000K	(RA) >80	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027G0B930003000000</u>	4x4100Lm	4x38.5W	3000K	(RA) >90	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027H0B840003000000</u>	4x4450Lm	4x33W	4000K	(RA) >80	Black (RAL 9005)	15°/30°/45°/60°
<u>1.027H0B940PW3000000</u>	4x4400Lm	4x38.5W	4000K	(RA) >90	Black (RAL 9005)	15°/30°/45°/60°

© 2020 Light4U BV. All rights reserved. Please visit [light4u.io](http://light4u.io) for more information.