



CARDAN LARGE THREE



Recessed cardanic LED downlight supplied in white, grey and black. Available in CCT from 2700K till 5700K in CRI80 or CRI90 and also in special colors for retail use. Reflectors with 15°, 30°, 45° or 60° and various accessories allow installations in a large range of applications.

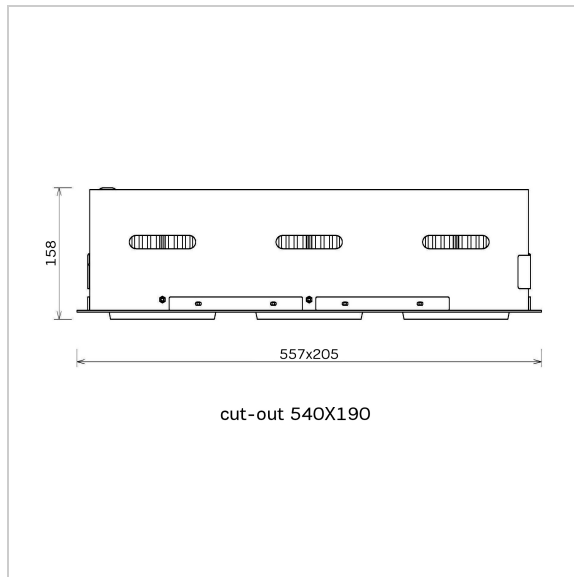



| Sku | Luminous Flux | Connected Load | CCT | CRI | Color housing | Beam angle |
|-----------------------------|----------------------|-----------------------|------------|------------|----------------------|-------------------|
| <u>1.021A0A830003000000</u> | 3x1250Lm | 3x9.5W | 3000K | (RA) >80 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021A0A930003000000</u> | 3x1050Lm | 3x9.5W | 3000K | (RA) >90 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021A0A940PW3000000</u> | 3x1100Lm | 3x9.5W | 4000K | (RA) >90 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021B0A840003000000</u> | 3x1300Lm | 3x9.5W | 4000K | (RA) >80 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021C0A930003000000</u> | 3x2000Lm | 3x18.5W | 3000K | (RA) >90 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021C0A940PW3000000</u> | 3x2150Lm | 3x18.5W | 4000K | (RA) >90 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021D0A830003000000</u> | 3x2400Lm | 3x18.5W | 3000K | (RA) >80 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021D0A840003000000</u> | 3x2500Lm | 3x18.5W | 4000K | (RA) >80 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021E0A830003000000</u> | 3x3250Lm | 3x26W | 3000K | (RA) >80 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021E0A930003000000</u> | 3x3000Lm | 3x30W | 3000K | (RA) >90 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021E0A940PW3000000</u> | 3x3250Lm | 3x30W | 4000K | (RA) >90 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021F0A840003000000</u> | 3x3370Lm | 3x26W | 4000K | (RA) >80 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021G0A830003000000</u> | 3x4250Lm | 3x33W | 3000K | (RA) >80 | White (RAL 9003) | 15°/30°/45°/60° |

| Sku | Luminous Flux | Connected Load | CCT | CRI | Color housing | Beam angle |
|-----------------------------|---------------|----------------|-------|-------------|------------------------|-----------------|
| <u>1.021G0A930003000000</u> | 3x4100Lm | 3x38.5W | 3000K | (RA) >90 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021H0A840003000000</u> | 3x4450Lm | 3x33W | 4000K | (RA) >80 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021H0A940PW3000000</u> | 3x4400Lm | 3x38.5W | 4000K | (RA) >90 | White (RAL 9003) | 15°/30°/45°/60° |
| <u>1.021A0C830003000000</u> | 3x1250Lm | 3x9.5W | 3000K | (RA) >80 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021A0C930003000000</u> | 3x1050Lm | 3x9.5W | 3000K | (RA) >90 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021A0C940PW3000000</u> | 3x1100Lm | 3x9.5W | 4000K | (RA) >90 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021B0C840003000000</u> | 3x1300Lm | 3x9.5W | 4000K | (RA) >80 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021C0C930003000000</u> | 3x2000Lm | 3x18.5W | 3000K | (RA) >90 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021C0C940PW3000000</u> | 3x2150Lm | 3x18.5W | 4000K | (RA) >90 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021D0C830003000000</u> | 3x2400Lm | 3x18.5W | 3000K | (RA) >80 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021D0C840003000000</u> | 3x2500Lm | 3x18.5W | 4000K | (RA) >80 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021E0C830003000000</u> | 3x3250Lm | 3x26W | 3000K | (RA) >80 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021E0C930003000000</u> | 3x3000Lm | 3x30W | 3000K | (RA) >90 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021E0C940PW3000000</u> | 3x3250Lm | 3x30W | 4000K | (RA) >90 | Grey (RAL 9006) | 15°/30°/45°/60° |

| Sku | Luminous Flux | Connected Load | CCT | CRI | Color housing | Beam angle |
|-----------------------------|---------------|----------------|-------|-------------|------------------------|-----------------|
| <u>1.021F0C840003000000</u> | 3x3370Lm | 3x26W | 4000K | (RA) >80 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021G0C830003000000</u> | 3x4250Lm | 3x33W | 3000K | (RA) >80 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021G0C930003000000</u> | 3x4100Lm | 3x38.5W | 3000K | (RA) >90 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021H0C840003000000</u> | 3x4450Lm | 3x33W | 4000K | (RA) >80 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021H0C940PW3000000</u> | 3x4400Lm | 3x38.5W | 4000K | (RA) >90 | Grey (RAL 9006) | 15°/30°/45°/60° |
| <u>1.021A0B830003000000</u> | 3x1250Lm | 3x9.5W | 3000K | (RA) >80 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021A0B930003000000</u> | 3x1050Lm | 3x9.5W | 3000K | (RA) >90 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021A0B940PW3000000</u> | 3x1100Lm | 3x9.5W | 4000K | (RA) >90 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021B0B840003000000</u> | 3x1300Lm | 3x9.5W | 4000K | (RA) >80 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021C0B930003000000</u> | 3x2000Lm | 3x18.5W | 3000K | (RA) >90 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021C0B940PW3000000</u> | 3x2150Lm | 3x18.5W | 4000K | (RA) >90 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021D0B830003000000</u> | 3x2400Lm | 3x18.5W | 3000K | (RA) >80 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021D0B840003000000</u> | 3x2500Lm | 3x18.5W | 4000K | (RA) >80 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021E0B830003000000</u> | 3x3250Lm | 3x26W | 3000K | (RA) >80 | Black (RAL 9005) | 15°/30°/45°/60° |

| Sku | Luminous Flux | Connected Load | CCT | CRI | Color housing | Beam angle |
|-----------------------------|---------------|----------------|-------|-------------|------------------------|-----------------|
| <u>1.021E0B930003000000</u> | 3x3000Lm | 3x30W | 3000K | (RA) >90 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021E0B940PW3000000</u> | 3x3250Lm | 3x30W | 4000K | (RA) >90 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021F0B840003000000</u> | 3x3370Lm | 3x26W | 4000K | (RA) >80 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021G0B830003000000</u> | 3x4250Lm | 3x33W | 3000K | (RA) >80 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021G0B930003000000</u> | 3x4100Lm | 3x38.5W | 3000K | (RA) >90 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021H0B840003000000</u> | 3x4450Lm | 3x33W | 4000K | (RA) >80 | Black (RAL 9005) | 15°/30°/45°/60° |
| <u>1.021H0B940PW3000000</u> | 3x4400Lm | 3x38.5W | 4000K | (RA) >90 | Black (RAL 9005) | 15°/30°/45°/60° |

© 2020 Light4U BV. All rights reserved. Please visit light4u.io for more information.